


U 1

Однослотовое базовое шасси

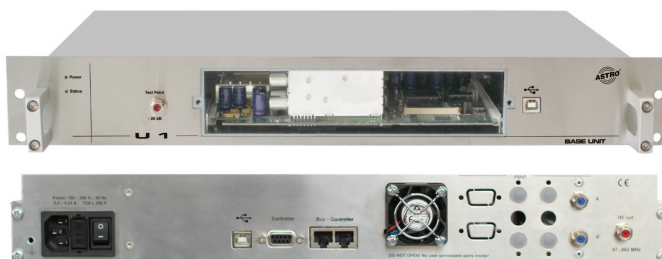

- Базовое шасси для установки 1-го модуля, 19"
 - Полная совместимость с модулями X и V серии
 - Независимая настройка и управление с помощью HE Programming Software
- T** Тестовый отвод -20дБ, блок питания, температурно управляемый вентилятор для охлаждения

Type		U 1	
Order number		380 104	
EAN-Code		4026187131678	
RF parameters			
Frequency range	[MHz]	47 - 862	
Output level (max.)	[dBμV]	analogue: 100; digital: 96	
Gain	[dB]	6	
Return loss	[dB]	≥ 10	
Testpoint	[dB]	- 20	
Common data			
		Front	Rear
Number of signa inputs		-	variable, typ. 2
Output		-	1 x F-jack
Testpoint		1 x BNC-jack	-
USB-jacks (Can not be used simultaneously!)		1 x USB-B	1 x USB-B
Serial interface RS232		-	1 x 9-poles Sub-D
ASTRO Bus System		-	2 x RJ45
Fan		-	1 x (2 levels)
Indication		1 x Power, 1 x Status	-
On- / OFF switch		-	1 x
Voltage supply	[V~/Hz]	100 - 240~ /50	
EMV		compliant to EN 50083-2	
Ambient temperature	[°C]	+5...+50	
Housing		19" / 1,5 HE	
Weight	[kg]	3,1	
Power consumption (without plug-in card)	[W]	10	